



US006026540A

United States Patent [19]

Wright et al.

[11] Patent Number: 6,026,540
[45] Date of Patent: Feb. 22, 2000

[54] UPRIGHT VACUUM CLEANER WITH
CYCLONIC AIRFLOW

[75] Inventors: Michael F. Wright, Stow; Charles J. Thur; Brett A. Latimer, both of Mentor; Paul D. Stephens, Cleveland Hts.; Mark E. Cipolla, Chardon, all of Ohio

[73] Assignee: Royal Appliance Mfg. Co., Cleveland, Ohio

[*] Notice: This patent is subject to a terminal disclaimer.

[21] Appl. No.: 09/122,541

[22] Filed: Jul. 24, 1998

Related U.S. Application Data

[63] Continuation-in-part of application No. 09/004,999, Jan. 9, 1998.

[51] Int. Cl.⁷ A47L 9/10
[52] U.S. Cl. 15/347; 15/353
[58] Field of Search 15/353, 352, 347; 55/337, 523, 528, 379, DIG. 2, DIG. 3

[56] References Cited

U.S. PATENT DOCUMENTS

2,316,836 4/1943 Breuer .
2,394,923 2/1946 Little .
2,507,897 5/1950 Gavagnin .
2,516,707 7/1950 Lewyt et al. .
2,921,646 1/1960 Poole .
3,177,635 4/1965 Cawl et al. .
3,320,727 5/1967 Farley .
3,797,064 3/1974 MacFarland .
3,820,310 6/1974 Fromknecht et al. .
3,910,781 10/1975 Bryant, Jr. .
4,072,483 2/1978 Doyle, Jr. .
4,108,778 8/1978 Lambert et al. .
4,118,208 10/1978 Klinedinst .
4,172,710 10/1979 van der Molen .
4,198,726 4/1980 Powell, Jr. .

4,268,288 5/1981 Coombs .
4,276,070 6/1981 Hug .
4,284,422 8/1981 Ferland .
4,355,434 10/1982 Gongwer .
4,373,228 2/1983 Dyson .
4,443,235 4/1984 Brenholt et al. .
4,457,043 7/1984 Oeberg et al. .
4,486,206 12/1984 Miyakawa et al. .
4,571,772 2/1986 Dyson .

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

1049292 2/1964 United Kingdom .
2265096 9/1993 United Kingdom .
2 280 388 2/1995 United Kingdom .
WO 84 02282 6/1984 WIPO .

Primary Examiner—Robert J. Warden, Sr.

Assistant Examiner—Andrew Aldag


Attorney, Agent, or Firm—Fay, Sharpe, Fagan, Minnich & McKee, LLP

[57]

ABSTRACT

An upright vacuum cleaner (A) includes an upright housing section (B) and a nozzle section (C). A cyclonic airflow dirt and dust separating chamber (54) is defined in said upright housing section. A suction source (E) pulls air and entrained dirt, dust, and other contaminants through a main suction opening (26) formed in the underside (24) of the nozzle and into the cyclonic airflow chamber (54). The cyclonic airflow chamber causes the suction airstream to travel in a cyclonic path such that the entrained contaminants are separated therefrom and deposited into a dirt container (52) that defines the lower portion of the chamber (54). A main filter element (H) filters residual contaminants from the suction airstream between the chamber and the suction source. The main filter element is preferably made from high-density polyethylene porous filter media. A final filter assembly (F) filters the suction airstream discharged by the suction source to ensure that the air discharged into the atmosphere is contaminant free, including those contaminants introduced into the airstream by the suction source itself.

22 Claims, 20 Drawing Sheets

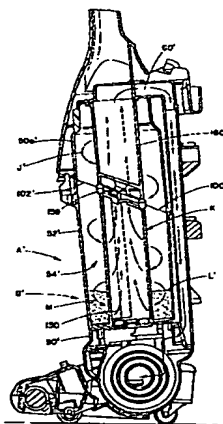

6,026,540

Page 2

U.S. PATENT DOCUMENTS

4,573,236	3/1986	Dyson .	5,145,499	9/1992	Dyson .
4,593,429	6/1986	Dyson .	5,160,356	11/1992	Dyson .
4,643,748	2/1987	Dyson .	5,230,722	7/1993	Yonkers .
4,718,924	1/1988	DeMarco .	5,248,323	9/1993	Stevenson .
4,769,052	9/1988	Kowalski .	5,267,371	12/1993	Soler et al. .
4,826,515	5/1989	Dyson .	5,271,751	12/1993	Lugler et al. .
4,853,008	8/1989	Dyson .	5,287,591	2/1994	Rench et al. .
4,853,011	8/1989	Dyson .	5,307,538	5/1994	Rench et al. .
4,944,780	7/1990	Usmani .	5,427,597	6/1995	Osendorf .
5,062,870	11/1991	Dyson .	5,464,460	11/1995	Bosses .
5,078,761	1/1992	Dyson .	5,593,479	1/1997	Frey et al. .
5,090,975	2/1992	Requejo et al. .	5,603,741	2/1997	Frey .
5,090,976	2/1992	Dyson .	5,685,894	11/1997	Bowerman .
5,101,532	4/1992	Dyson .	5,704,956	1/1998	Loveless et al. .
			5,779,745	7/1998	Kilstrom .